

Correct waering method:



1. Wear after ulnarstyloid is best ;
2. Adjust the adjustment hole which suit for your wrist, fasten the buckle;
3. Sensor should be close tot he skin to avoid moving.

Bracelet charge :

Make sure that the battery have power in first time use. If less power to turned on, please connect the charger to charge the device, the bracelet will turn on automatically.

Charge way :

1. Please charge the bracelet with a dedicated charging cable.
2. Align the charging pin to the clip charging cable with the charging contact of the bracelet



as shown in the picture on the right;

3. USB charger connect with the computer or the 5V USB interface charger.

Turn on/off

1. When device off, press the touch button for more than 4 seconds, device will vibrate and turn on;
2. When device on, find the shutdown interface „  “ then press the touch button for more than 4 seconds, device will vibrate and turn off.

Bracelet operation

1. Device on, press the touch button to light up the screen;
2. Acquiescence clock ist he first page , press the touch button to switch different pages, without operation 3 seconds screen off;
3. Switch to the heart rate and blood pressure page it will start test automatically,when it finished screen off after 40 seconds


Install APP in mobile phone



1. Search for the „ Lefun Health“ in the App store (Apple store / Google Play)
2. Scan QR code to download. Support above IOS 8.0 and Android 4.4 System mobil phone above bluetooth 4.0

Bluetooth connect

1. Open App,(it will note that need user open required permissions at first time, please all agree);
2. Click on the top left corner of the screen Menu icon it will appear menu functions, click to device search page (keep cellphone Bluetooth on) Search for device Bluetooth name F3 or F1 and cnnect.

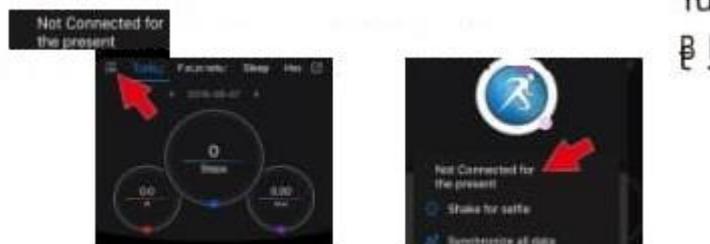

3. After the pairing success, APP will save the Bluetooth adress off he bracelet automatically. When the APP is opened or running in the background, it will search and connect the bracelet automatically.
4. Android phone please ensure that all permissions such as running and reading contact information in the background given in the installation or mobile phone system settings.

APP function and setting

Set personal informations when ou login; My data – personal data, gender – age – height – weight.

Target setting

My data – Target setting Also can set daily sport and sleeping target. Monitor daily completion please set time for sedentary reminder or you can turn it off in the message alert.

After sync with phone, bracelet will adjust the automatically. Press the main interface for 4 seconds, different main interfaces can be replaced.



Search mobile

At this interface and press it for 4 seconds to start searching mobile; in bluetooth connection the connected mobile will give out prompt sound;



Information view

Press the interface for 4 seconds, you can see the content of the recently received information.



Message remind / Call remind:

Call remind:

Keep connected, if the call alert function is enabled, the wristband will vibrate and display the name or number of the caller when the call comes in. (you need to give APP read address book permission)

Message remind:

Keep connected the SMS remind function is enabled the bracelet will vibrate when message comes in.

Other remind:

Keep connected, if the function is enabled the bracelet will vibrate when there is a message such as WhatsApp, facebook etc. (you have to give the APP permission to get system notifications)

Android user Tips:

When using the reminder function you need to set it to allow „live Health“ to run in the background, recommended to add „live Health“ to the rights management and turn on all permissions.

Sedentary reminder;

Set turn on/off sedentary reminder function. You can set the reminder interval in the profile. If you sit for a long time in the set time the bracelet will remind you.



Smart alarm

Keep connected, can set 6 alarms, after setting, they will be synchronized to the bracelet; Support offline alarm. After synchronization is

successful, even if the APP is not connected, the bracelet will remind you according to the set time.



Looking for bracelet;

Keep connected, click on the „look for the bracelet” option and the bracelet will vibrate.



Shake and take a picture;

Keep connected, enter the shaking photo interface, shake the bracelet, take a photo automatically after 3 seconds of counting down, please allow the APP to access the album to save the self – portrait photos.



Sleep mode;

When you fall a sleep, bracelet will enter the sleep monitoring mode automatically; detect your Awake/light sleep/ deep sleep, calculate your sleep quality, sleep data only support APP side view.

Note: Sleep data will only be available when you wear the bracelet to sleep and will be synced to the app after 9:00am the next day.

Specifications:

Device type: Smart bracelet

Battery type: LI-polymer 230mAh

Vibrate motor: support

Sync way: Bluetooth 4.0

Work temperature: -10-50 C

Sensor: a photoelectric heart rate

Device Requirement: above IOS8.0 / Android 5.0 / above Bluetooth 4.0

Component introduction

“Host” wrist strap, charging cable, Packing box, manual

Tips:

1. Not suitable for bathing and swimming
2. Please connect the bracelet when synchronizing data
3. Use original charging cable to charge
4. Do not expose the handle ring to place high moisture, high temperature or very low temperature for a long time
5. Charging requirements: Charge the charger with the specification of 6V 0,2-2A. If it is not used for a long time, please turn off and ensure that it is recharged every months

